

Lumen Tech

Lighting, Inc.

Design AL354

Surface Mount Area Light

Maximum 50 Watt Metal Halide

70W High Pressure Sodium

Or 1-26W PLT Compact Fluorescent

With 1/2" Hole For Optional Photo Cell

Specifications

Housing: High impact polycarbonate lens and housing with silicone gasket, finished bronze.

Reflector: Anodized aluminum, computer designed in conjunction with the lens for efficiency.

Ballast HID: Pre-wired H.P.F. core and coil with capacitor. **CF:** Compact fluorescent electronic high power factor class P, universal voltage 120V—277V 50 / 60 Hz.

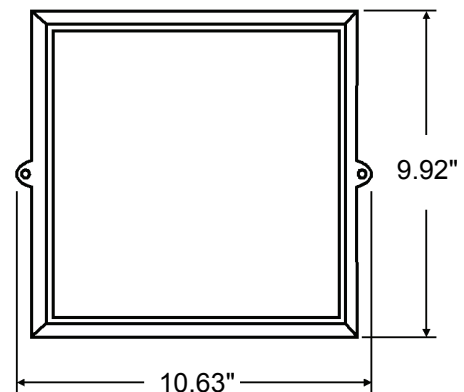
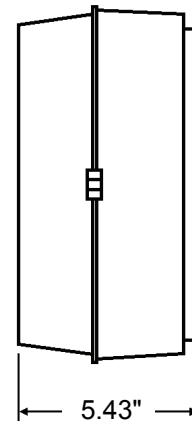
Lamp HID: Clear medium base lamp. **CF:** PLT max 1-26W. (by others).

Lamp Holder HID: High heat 4 K.V. rated, w/nickel plated copper screw shell, spring loaded center contact. **CF:** White thermoplastic with snap-in lamp retainer springs.



Photometric Information: Contact factory.

Labels: U/L, listed suitable for wet location.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



Ordering Information

Catalog Number	Watts	Light Source
AL35450H	50	HPS
AL35470H	70	HPS
AL35450M	50	MH
WP3542PL13 	2-PL13	Compact Fluorescent
WP354T26 	1-PLT26	Compact Fluorescent



Think Green

Lumen Tech

Lighting, Inc.

Design AL354

Surface Mount Area Light

Maximum 50 Watt Metal Halide

70W High Pressure Sodium

Or 1-26W PLT Compact Fluorescent

With 1/2" Hole For Optional Photo Cell

**Contact Factory
For
Photometric
Information**

