

Lumen Tech

Lighting, Inc.

Design QADi20

Slip-Fitter / Wall Mount Adjustable Area Light
With 40W Induction Lamp
Rated 100,000 Hour Average Life

Specifications

Housing: Die cast aluminum construction with corrosion resistant hardware. 2-3/8" Tenon adjustable slip-fitter mount. Optical housing swivels from 0 to 30 degrees to aim light where it's needed. See finish note.

Door Frame: Die cast aluminum, one piece silicone gasket, seals door frame to housing. See finish note.

Lens: Impact resistant clear tempered glass, silicone caulked to door frame.

Reflector: Anodized aluminum, designed for maximum efficiency, type III or forward throw distribution.


High Frequency Generator: High frequency electronic generator. Operating in a range of 120 to 277 volts 50 or 60 Hz.

Lamp: Inductively coupled electrode less fluorescent lamp with average rated life 100,000 hours CRI=80 color temp 2700K — 6500K.

Finish: Bronze, black, white or gray detergent cleaned, prime coated. Chip resistant powder urethane polyester coating.

Photometric Information: Contact factory.

Labels: Rated IP65, U/L listed suitable for wet location.

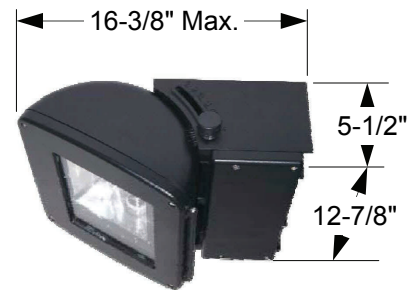


Ordering Information

Catalog Number	Watts	Light Source
Type III Distribution		
QAD20i340	40	Fluorescent Induction Lamp

Forward Throw Distribution

QAD20iF40	40	Fluorescent Induction Lamp
-----------	----	----------------------------

Color Options: Suffix catalog number with **W** for white, **BL** for black, **BZ** for bronze or **G** for gray.

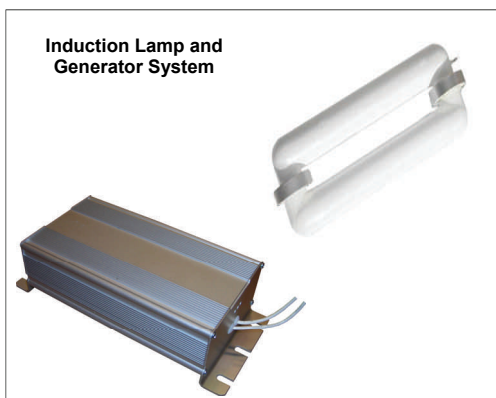

Mounting Options



Single Arm Bracket **QADBK1**



Wall Mount Bracket **QADWM**



Twin Arm Bracket **QADBK2**



Twin Arm Cover **QADCV2**



Triple Arm Bracket **QADBK3**



Triple Arm Cover **QADCV3**



Quad Arm Bracket **QADBK4**



Quad Arm Cover **QADCV4**

Lumen Tech

Lighting, Inc.

Design QADi20

Slip-Fitter / Wall Mount Adjustable Area Light

With 40W Induction Lamp

Rated 100,000 Hour Average Life

**Contact Factory
For
Photometric
Information**