

# Lumen Tech

Lighting, LLC.

## Design QGLi

16" Diameter Open Acrylic Refractor  
With 80W Induction Lamp  
Rated 100,000 Hour Average Life

### Specifications

**Housing:** Heavy duty die cast aluminum construction with corrosion resistant hardware and mounting hook. See finish note.

**Refractor:** Injection molded prismatic acrylic. Provides brightness control, designed for maximum efficiency.

**High Frequency Generator:** High frequency electronic generator. Operating in a range of 120 to 277 volts 50 or 60 Hz.


**Lamp:** Inductively coupled electrode less fluorescent lamp with average rated life 100,000 hours CRI=80 color temp 2700K — 6500K.

**Finish:** Silver, detergent cleaned, prime coated. Chip resistant powder urethane polyester coating, electrostatic applied and baked.

**Photometric Information:** Contact factory.

**Labels:** U/L, CUL listed suitable for damp location.

*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE*

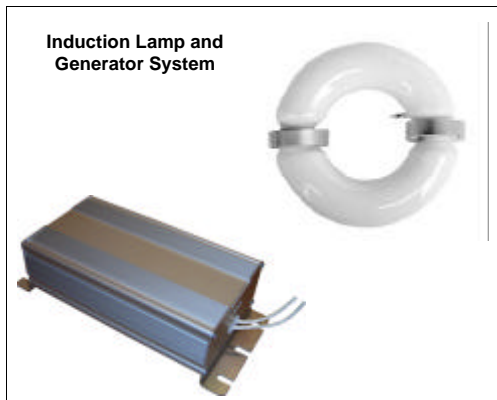

Induction Lamp and Generator System



### Ordering Information

Open Aperture Fixtures

Catalog Number	Watts	Light Source
QGL80i	80	Induction Lamp

Options Suffix Catalog Number With

- F** Flat Acrylic Lens
- A** Dropped Acrylic Refractor



Easy hang quick surface mount bracket for one person installation allows two hands free for wiring.