

Lumen Tech

Lighting, Inc.

Design QNGQL 

Parking Garage Luminaire
16" Diameter Acrylic Refractor
With Philips QL Induction Lamp
Rated 100,000 Hour Average Life

Specifications

Housing: Heavy duty die cast aluminum construction with corrosion resistant hardware and mounting hook. See finish note.

Refractor: Injection molded prismatic acrylic. Provides brightness control, designed for maximum efficiency.

High Frequency Generator: High frequency electronic generator. Operating in a range of 120 to 277 volts 50 or 60 Hz.

Lamp: Inductively coupled electrode less fluorescent lamp with average rated life 100,000 hours CRI=80 color temp 2700K — 6500K.

Finish: Silver, detergent cleaned, prime coated. Chip resistant powder urethane polyester coating, electrostatic applied and baked.

Photometric Information: Contact factory.

Labels: U/L, CUL listed suitable for damp location.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE



Ordering Information

Open Aperture Fixtures




Catalog Number	Watts	Light Source
QNGQL55	55	Induction Lamp
QNGQL85	85	Induction Lamp
QNGQL165	165	Induction Lamp



Lumen Tech

Lighting, Inc.

Design QNGQL 
Parking Garage Luminaire
16" Diameter Acrylic Refractor
With Philips QL Induction Lamp
Rated 100,000 Hour Average Life

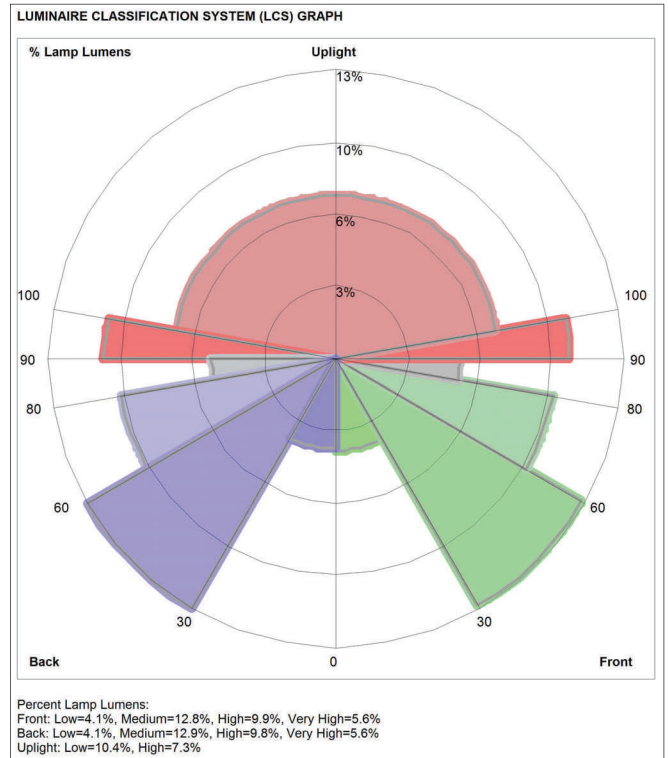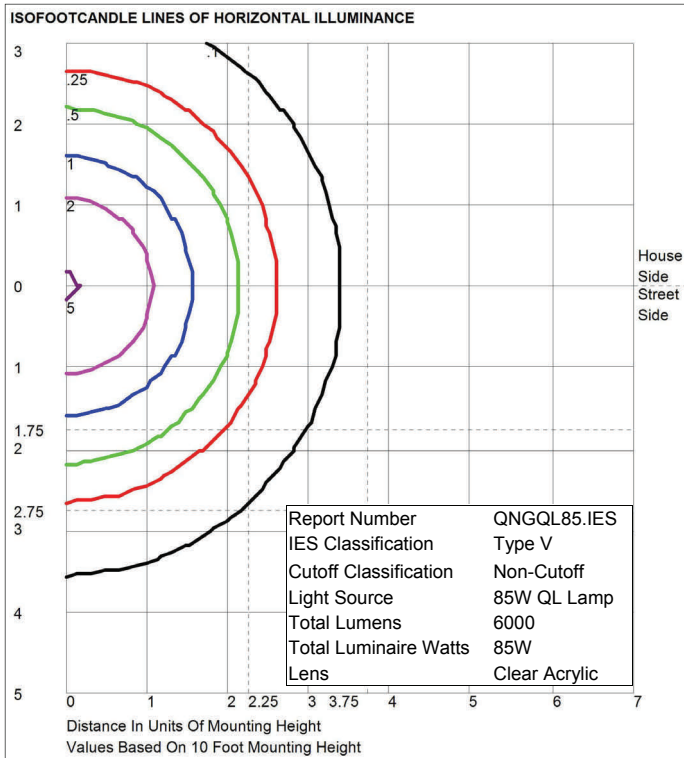

Easy hang quick surface mount bracket for one person installation allows two hands free for wiring.

