

Lumen Tech

Lighting, Inc.

Pegasus LED Series Design QAD Wall / Pole Mount Luminaire 25 Watt, 50 Watt or 90 Watt Super Bright White LED Up To 80,000 Hour Average Rated Life

THINK GREEN WITH LED LIGHTING

LED's (Light Emitting Diodes) are more efficient than traditional H.I.D. (High Intensity Discharge) light sources consuming as much as 75% less energy.

H.I.D. Light sources (Metal Halide and High Pressure Sodium) are rated at 10,000 to 20,000 hours useful life. LED's are rated up to 80,000 hours providing much lower maintenance costs.

LED fixtures providing better energy efficiency and a better quality of useable light.



**DARK SKY
COMPLIANT
IES FULL CUTOFF**

Specifications

Housing: Die cast aluminum construction with corrosion resistant hardware. 2-3/8" Tenon adjustable slip-fitter mount. Optical housing swivels from 0 to 30 degrees to aim light where it's needed. See finish note.

Door Frame: Die cast aluminum, one piece silicone gasket, seals door frame to housing. See finish note.

Lens: Impact resistant clear tempered glass, silicone caulked to door frame.

Reflector: Anodized aluminum, computer designed with LED array for efficiency and wide distribution.


Light Source: Super bright white 25W, 50W or 90W LED array with cast aluminum heat sink 3500K or 4100K color temp. 120V—277V LED driver.

Finish: Bronze, black, white or gray detergent cleaned, prime coated. Chip resistant powder urethane polyester coating.

Photometric Information: Contact factory.

Labels: Rated IP65, U/L listed suitable for wet location.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

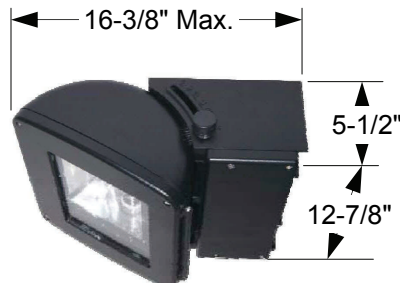

Mounting Options



Single Arm Bracket QADBK1



Wall Mount Bracket QADWM



Twin Arm Bracket QADBK2



Twin Arm Cover QADCV2



Triple Arm Bracket QADBK3



Triple Arm Cover QADCV3



Quad Arm Bracket QADBK4





Quad Arm Cover QADCV4

Lumen Tech

Lighting, Inc.

Pegasus LED Series
Design QAD Wall / Pole Mount Luminaire
 25 Watt, 50 Watt or 90 Watt Super Bright White LED
 Up To 80,000 Hour Average Rated Life

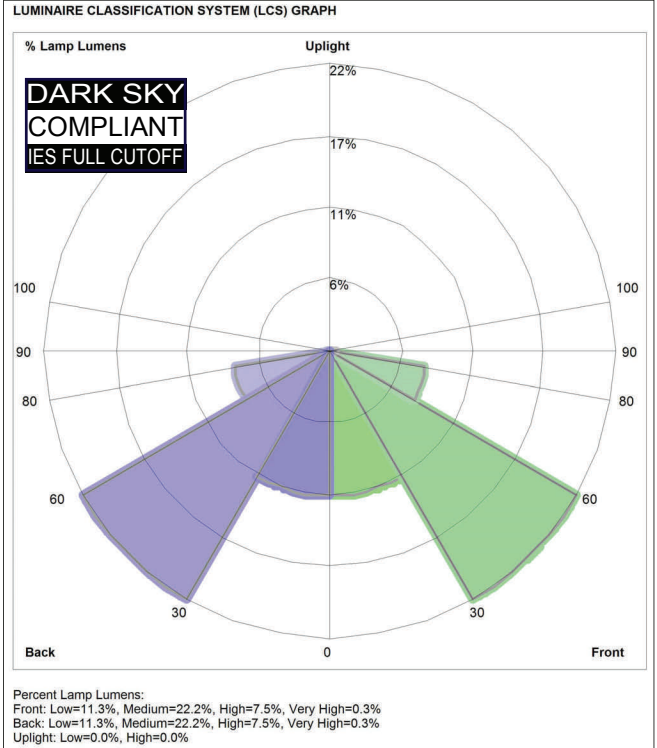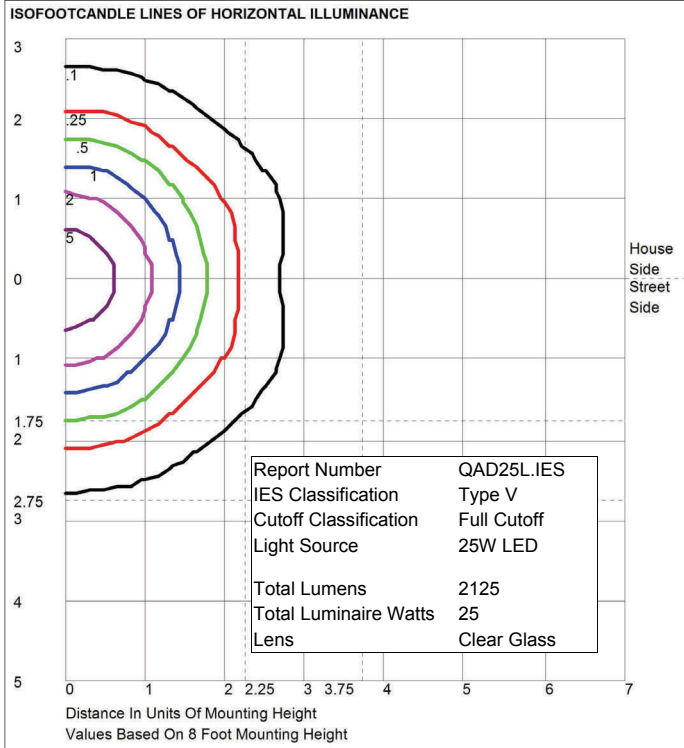

Ordering Information

Catalog Number	Watts	Light Source
QAD25L	25	Super Bright LED
QAD50L	50	Super Bright LED
QAD90L	90	Super Bright LED

Option	Order Catalog Number
Photocell	QADPC(voltage)

