

Lumen Tech

Lighting, Inc.

Design QSC35/36

Wall Sconce With Down or Up Down Light
Maximum 150W Metal Halide
High Pressure Sodium
Or 2-42W PLT Compact Fluorescent

Specifications

Housing: Heavy duty die-cast aluminum with quick mount system. Powder coated finish. See finish note.

Lens: Clear tempered glass silicone sealed to door frame.

Reflector: Anodized aluminum, computer designed for efficiency, classified type IV.

Ballast: H.I.D.: Pre-wired C.W.A., H.P.F. quad tap core and coil with capacitor. **CF:** Compact fluorescent electronic high power factor class P, universal voltage 120 thru 277 volt; 50/60 Hz.

Lamp: H.I.D.: Clear medium base. **CF:** PLT lamp max. 2-42W, 4 pin base (by others).

Lamp Holder: H.I.D.: High heat 4 K.V. rated, w/nickel plated copper screw shell, spring loaded center contact. **CF:** White thermoplastic with snap-in lamp retainer springs.







Finish: White, black or bronze, detergent cleaned, prime coated chip resistant powder urethane polyester coating. Contact factory for custom colors.

Photometric Information: Contact factory.








Labels: U/L listed suitable for wet location.

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE

Ordering Information Down Light

Catalog Number	Watts	Light Source
QSC35T26 	1-26	Compact Fluorescent
QSC35T32 	1-32	Compact Fluorescent
QSC35T42 	1-42	Compact Fluorescent
QSC352T26 	2-26	Compact Fluorescent
QSC352T32 	2-32	Compact Fluorescent
QSC352T42 	2-42	Compact Fluorescent
QSC3535H	35 (120V Only)	HPS
QSC3550H	50 (120 or 277V)	HPS
QSC3570H	70	HPS
QSC35100H	100	HPS
QSC35150H	150	HPS
QSC3570M	70	MH
QSC35100M	100	MH
QSC35150M	150	MH

Ordering Information Up / Down Light



QSC36T26 	1-26	Compact Fluorescent
QSC36T32 	1-32	Compact Fluorescent
QSC36T42 	1-42	Compact Fluorescent
QSC362T26 	2-26	Compact Fluorescent
QSC362T32 	2-32	Compact Fluorescent
QSC362T42 	2-42	Compact Fluorescent
QSC3635H 	35 (120V Only)	HPS
QSC3650H	50 (120 or 277V)	HPS
QSC3670H	70	HPS
QSC36100H	100	HPS
QSC36150H	150	HPS
QSC3670M	70	MH
QSC36100M	100	MH
QSC36150M	150	MH



QSC35 Down
Light Only



QSC36
UP/Down Light



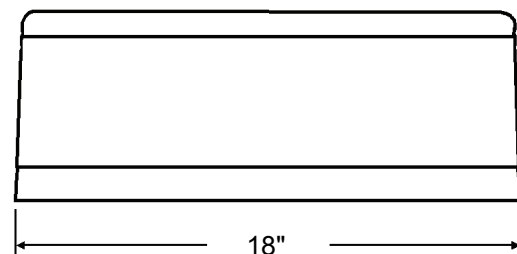
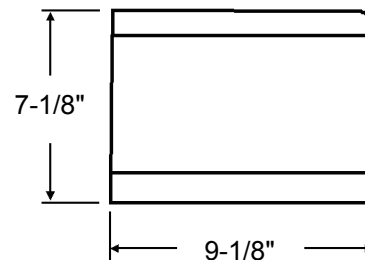


Lumen Tech

Lighting, Inc.

Design QSC35/36

Wall Sconce With Down or Up Down Light
Maximum 150W Metal Halide
High Pressure Sodium
Or 2-42W PLT Compact Fluorescent

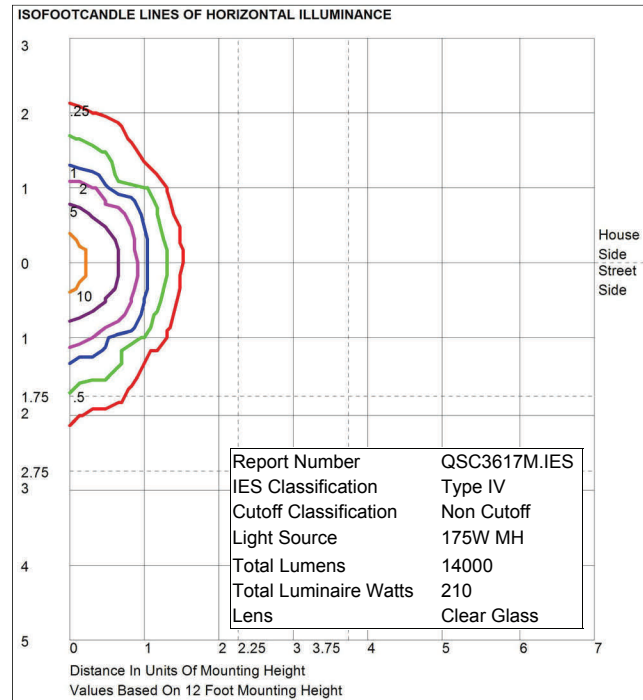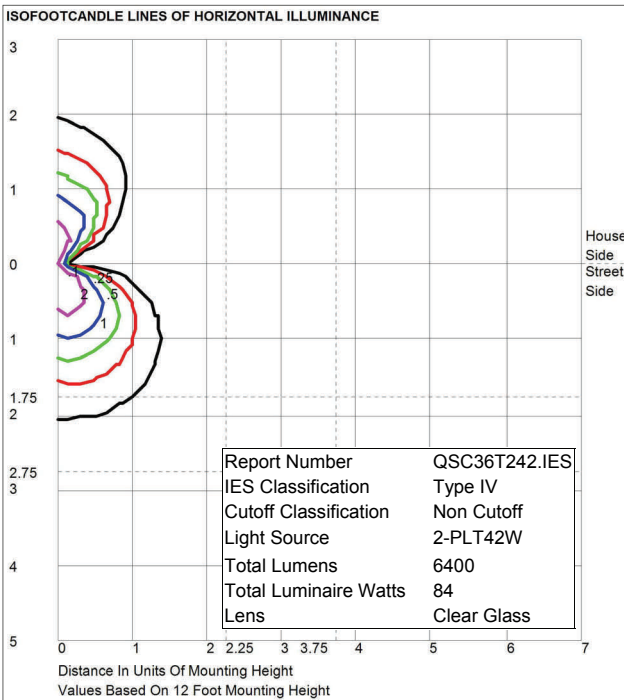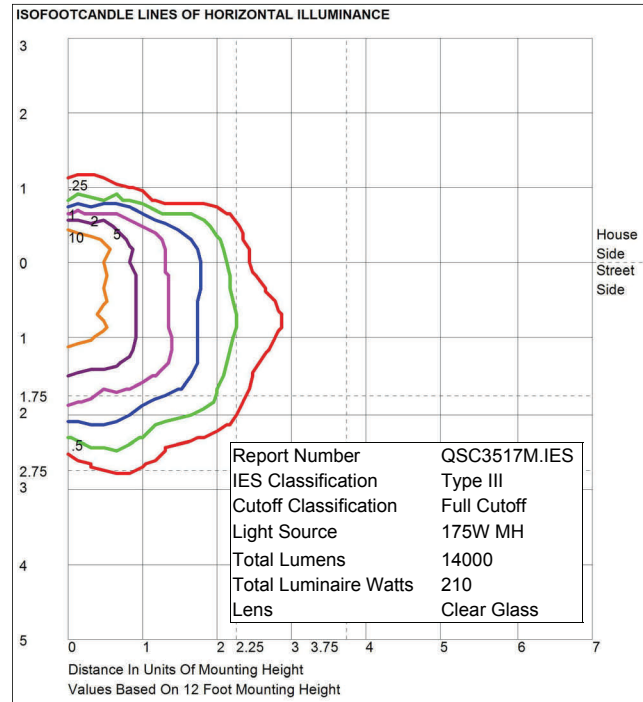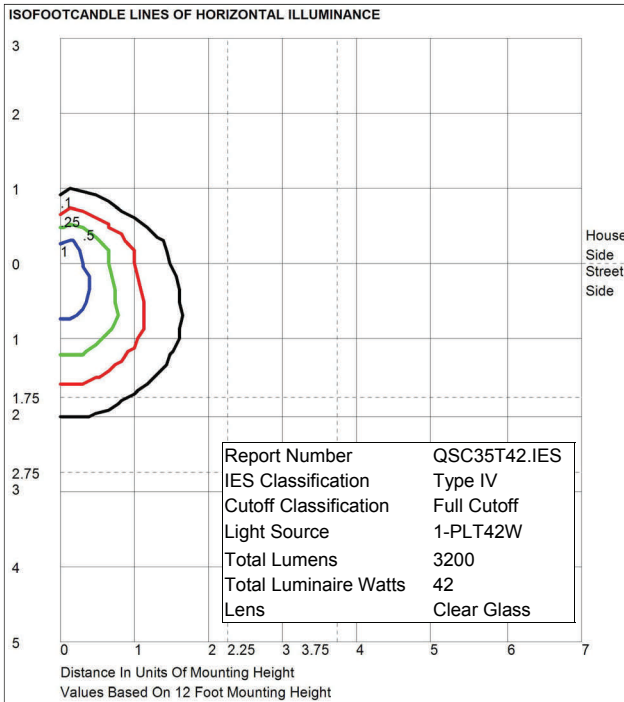

Options

- PC(Voltage)** Photocell Control
- QRS** Quartz Re-strike System (Less Lamp)
- QRST** Time Delay Quartz Re-strike System (Less Lamp)
- EMGB** Emergency 90min. Battery Backup CF Only
- MR16-1** GU5.3 Two Pin Socket for 12V Power (By Others)
- MR16-2** 2-GU5.3 Two Pin Sockets for 12V Power (By Others)
- FD(Voltage)** Fusing

