

# Lumen Tech

Lighting, Inc.

## Design WP353

Surface Mount Area Light

Maximum 100W Metal Halide

100W High Pressure Sodium

Or 2-42W PLT Compact Fluorescent  
With 1/2" Hole for Optional Photo-Cell

### Specifications

**Housing:** Die-cast aluminum housing with high impact borosilicate glass lens for maximum light distribution. Finished dark bronze. See finish note.

**Reflector:** Anodized aluminum, computer designed in conjunction with the lens for efficiency.

**Ballast HID:** Pre-wired C.W.A., H.P.F. core and coil with capacitor. **CF:** Compact fluorescent electronic high power factor class P, universal voltage 120V—277V 50 / 60 Hz.

**Lamp HID:** Clear medium base lamp. **CF:** PLT max 2-42W, 4 pin base. (by others).

**Lamp Holder HID:** High heat 4 K.V. rated, w/nickel plated copper screw shell, spring loaded center contact. **CF:** White thermoplastic with snap-in lamp retainer springs.

**Finish:** Bronze, detergent cleaned, prime coated. Chip resistant powder urethane polyester coating.







**Photometric Information:** Contact factory.


**Labels:** U/L, CUL listed suitable for wet location.



*SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE*

### Ordering Information

Catalog Number	Watts	Light Source
WP35350H	50	HPS
WP35370H	70	HPS
WP353100H	100	HPS
WP35350M	50	MH
WP35370M	70	MH
WP353100M	100	MH
WP353T26 	26	Compact Fluorescent
WP353T32 	32	Compact Fluorescent
WP353T42 	42	Compact Fluorescent
WP353T226 	2-26	Compact Fluorescent
WP353T232 	2-32	Compact Fluorescent
WP353T242 	2-42	Compact Fluorescent

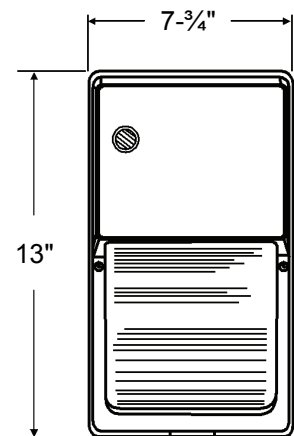

### Options



<b>PC(Voltage)</b>	Photocell Control
<b>QRS</b>	Quartz Re-strike System (Less Lamp)
<b>QRST</b>	Time Delay Quartz Re-strike System (Less Lamp)
<b>EMGB</b>	Emergency 90min. Battery Backup CF Only
<b>FD(Voltage)</b>	Fusing



# Lumen Tech

Lighting, Inc.

**Design WP353**  
**Surface Mount Area Light**  
**Maximum 100W Metal Halide**  
**100W High Pressure Sodium**  
**Or 2-42W PLT Compact Fluorescent**  
**With 1/2" Hole for Optional Photo-Cell**

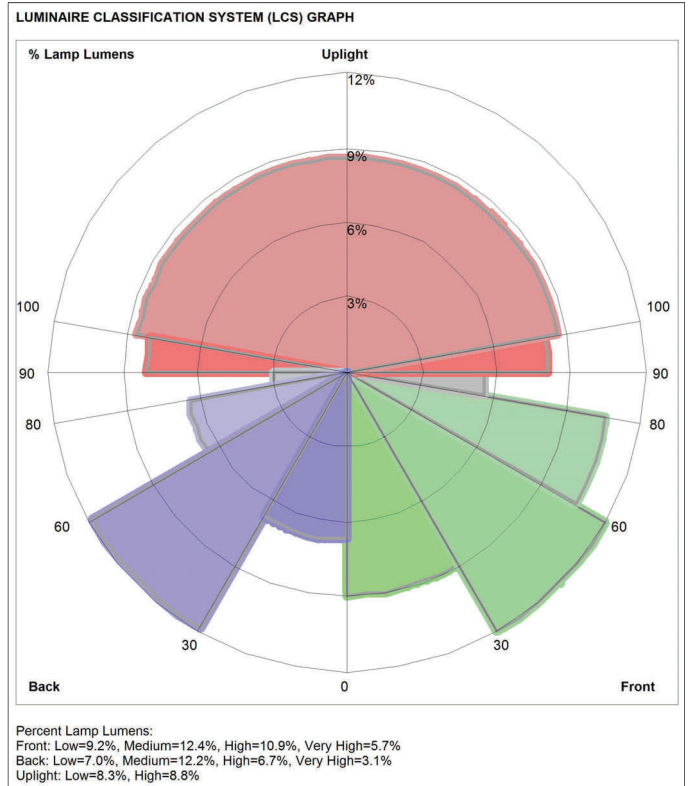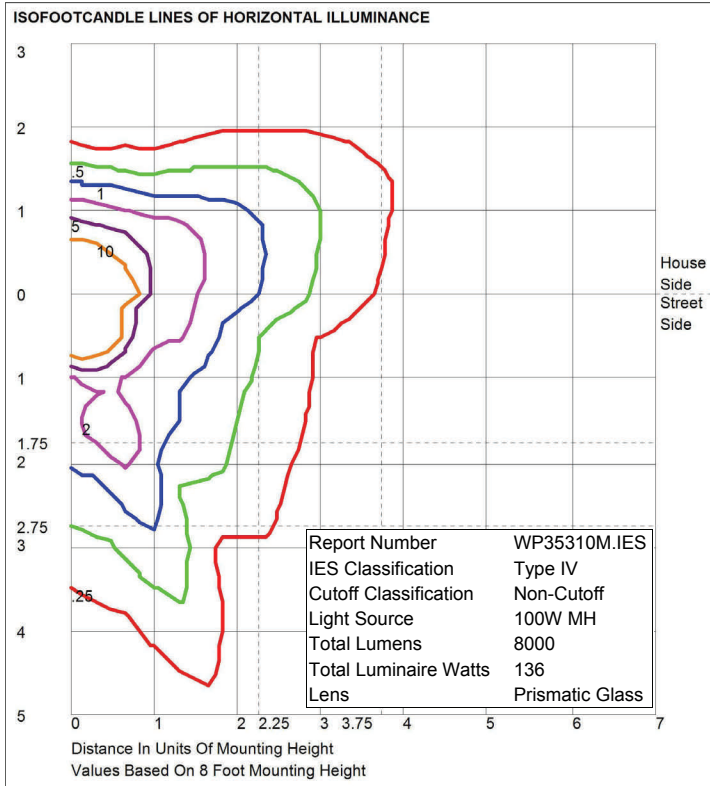

Wire-guard Option  
 Order Catalog #  
**WG353**

